

BB10C

KDS Bumpbar



FENGYU

Main Features

- Housing made of industrial grade strong plastic top and metal bottom
- 10 wide keys with durable metal dome switch
- Sealed flat panel membrane design
- PCB can be protected by conformal coating (optional, good for hot and humid working environment)
- All keys are programmable, powered by our Matrix Maker
- With RJ45-plug cable design, ease the cable replacement
- Easy to extract the paper layout for replacement purpose

Technical Specification



[Electronics]

Power supply

- USB: +5V/DC $\pm 5\%$
- Serial: +12V/DC $\pm 5\%$

Current input

- USB: <100mA
- Serial:<100mA

MTBF: 50,000 hours

Interfaces : USB/ RS232-COM

[Others]

Storage temperature: -40°C to +60°C



Operating temperature: 0°C to +50°C

Operating humidity: 20% to 90%

Dimensions: 175 x 95 x 26.6 mm

- Heng Yu Technology (HK) Limited
- <http://www.hengyu-tech.com>

2D Drawing

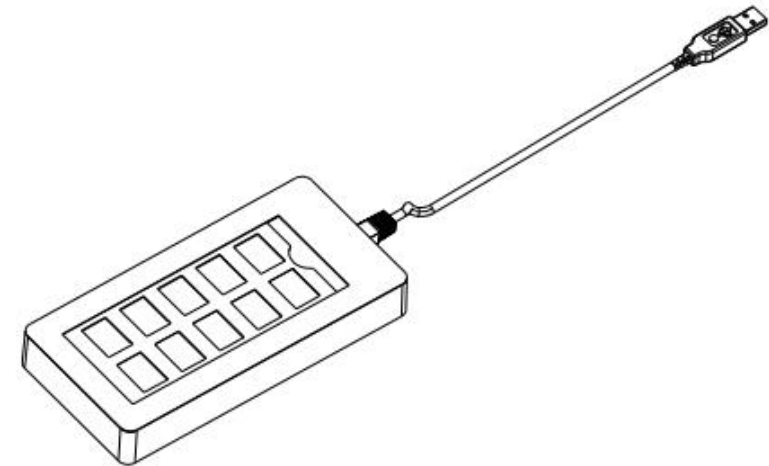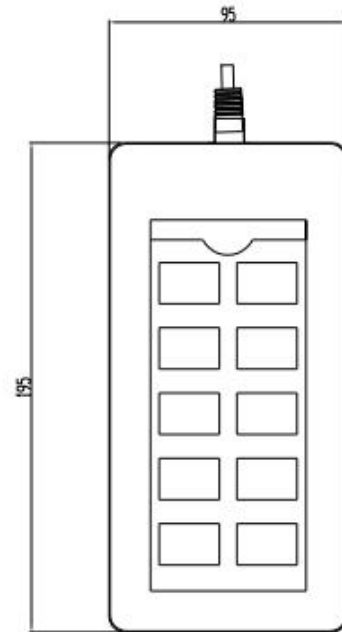

- Heng Yu Technology (HK) Limited
- <http://www.hengyu-tech.com>