

# S84B POS Keyboards





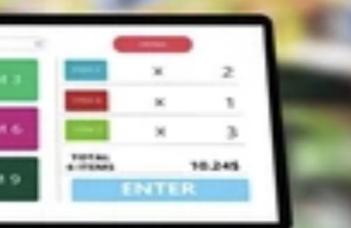

## S84B POS Keyboards

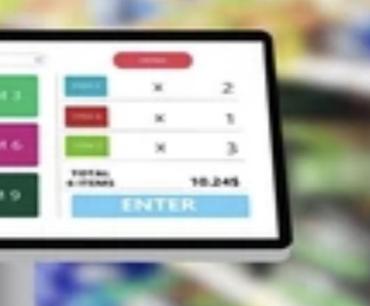

### **FENGYU**

### **Key Features**

84 fully programmable keys, 7x12 matrix All keys are made from Cherry MX key switches, good tactile feelings Programmable functions are powered by the Matrix Maker With internal strong metal plate to enhance the protection against ESD is increased Different relegendable keycaps (1 fold, 1.25 fold and 1.25x2 fold) are available Numeric profile keycaps are available Detachable cable, using the tough RJ45 connector Available in USB and PS/2 interface

#### **Programmable Features**

Powered by Matrix Maker, our programmable software running under Win7, Win8, Win10 and Win11 With optional Android based programming app Support OPOS, JPOS and UPOS All keys can be programmed with unlimited characters All data can be retained for no less than 100 years without additional battery Does not require a TSR program and hence avoids application software crashes Supports multi-layer programming Provides for a variable time delay of up to 255 seconds in each programmed string Provides true keyboard wedge function that operates with or without the normal computer keyboard connected Provide a true Caps/Scroll/Numeric Lock function independent of any other keyboards being connected

#### **Keylock Features**

6 steps keylock Each step can be programmed as a normal key or layer key Life cycle >= 25,000 times With clear step rotation



Heng Yu Technology (HK) Limited http://www.hengyu-tech.com

#### **Technical Data**

[Electronics]

Power supply

PS/2: +5V/DC ±10%

USB: +5V/DC ±5%

Current input

PS/2: <100mA

USB: <100mA

#### [Mechanical]

Total travel: 4 – 0.4mm Pre-travel: 2 ± 0.6mm Peak load before make: 60 ± 20cN

#### [Others]

Storage temperature: -40°C to +55°C Operating temperature: 0°C to +40°C Operating humidity: 40% to 90% Certificates: FCC/CE

#### [Model Options]

S84M: with built-in magstripe reader S84B: without magstripe reader



# FENGYU

Heng Yu Technology (HK) Limited http://www.hengyu-tech.com