

SRD-173A

Keyboard Console

FENGYU




SRD-173A

Main Features


- 17.3" installation, 1U (One Rack Unit).
- Easy and quick installation in the cabinet.
- Ergonomic design for comfortable working.
- Brilliant 17.3" LCD display with LED backlight.
- Equipped with full size keyboard, Numpad and Touch Pad function.
- Ball-bearing telescopic rails with energy chain.
- High-quality torque hinges hold the monitor in any position.
- Internal Power: DC 12V 3A, 200V to 220V input.
- Extra USB pass through port for extra USB device.
- Wireless Keyboard/Video/Mouse (KVM), working with dedicated Wireless HDMI dongle.
- Hotkeys available on the keyboard for KVM switching between devices/servers (up to 12 devices).
- Optional: country-specific keyboard.

Keyboard Console

Wireless Connection Mode

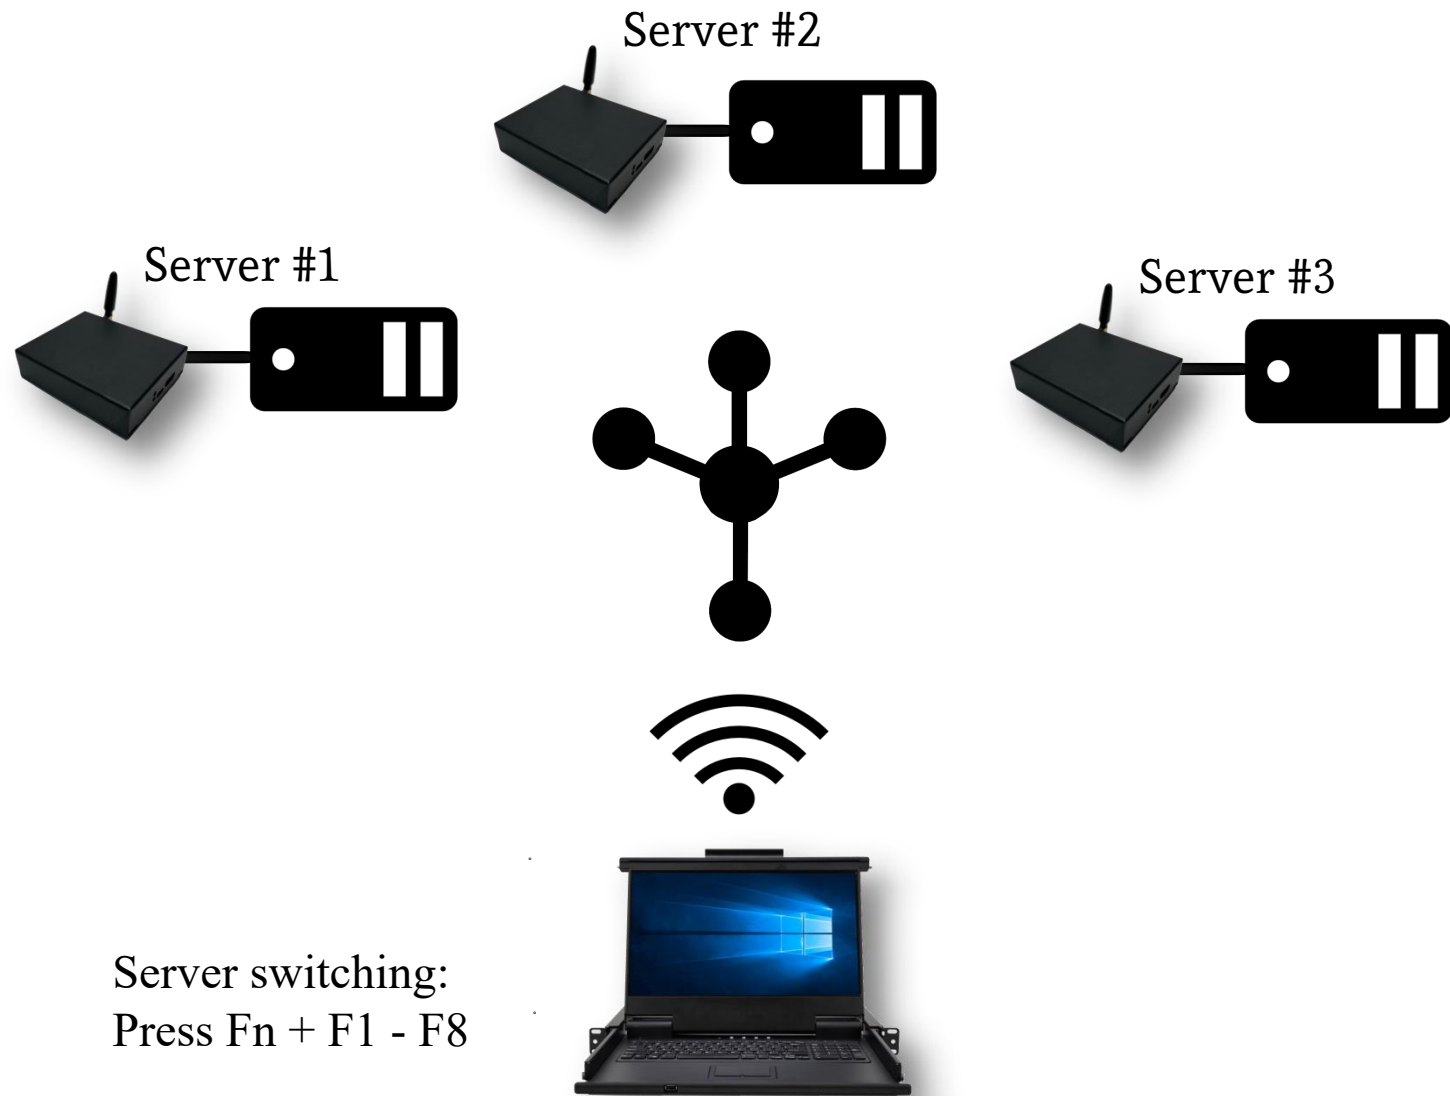


Server switching:
Press Fn + F1 - F8

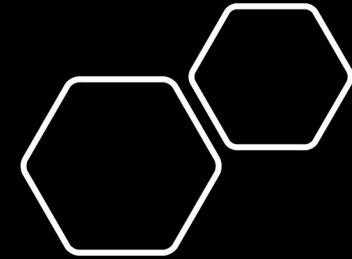

Technical Data

[Display]

- Resolution: 1920 x 1080 (HD)
- Contrast: 800:1
- Colors: 16.7 million
- Viewing angle: 85/ 85/ 85/ 85
- LED backlight life: min. 15000h
- Brightness: 250 cd/m²
- Interfaces: HDMI, DP, USB 2.0 pass through

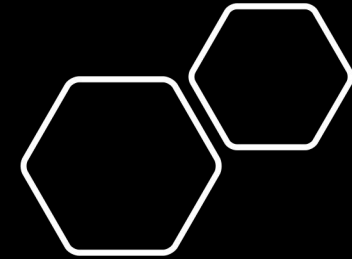

Technical Data

[Keyboard]


- 95 low profile notebook type scissor keys
- Good tactile feeling with long life rubber dome (10M keystroke striking)
- Keycap printed by silk screen with durable UV coating

[Touchpad]

- Active Area: 73mm x 37mm
- Gesture supported: All Windows gestures

[Others]

- Storage temperature: -20 to 60 °C
- Storage humidity: 5 to 90%
- Operating temperature: 0 to 50 °C
- Operating humidity: 5 to 90%
- Power consumption: 13 W
- Interfaces: USB, Wireless 5G WiFi connection

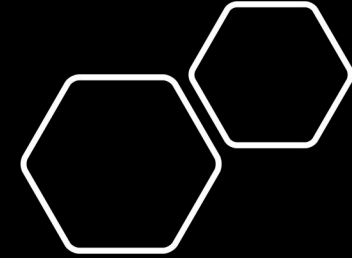



HENGYU

Heng Yu Technology (HK) Limited
<http://www.hengyu-tech.com>

Technical Data

[Mechanical Parameters: Wireless KVM]

- Standard 1U Rack Mount size
HxWxL: 44.45 mm x 482.6 mm x 400mm

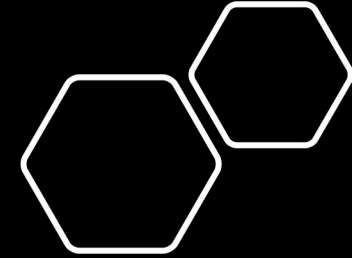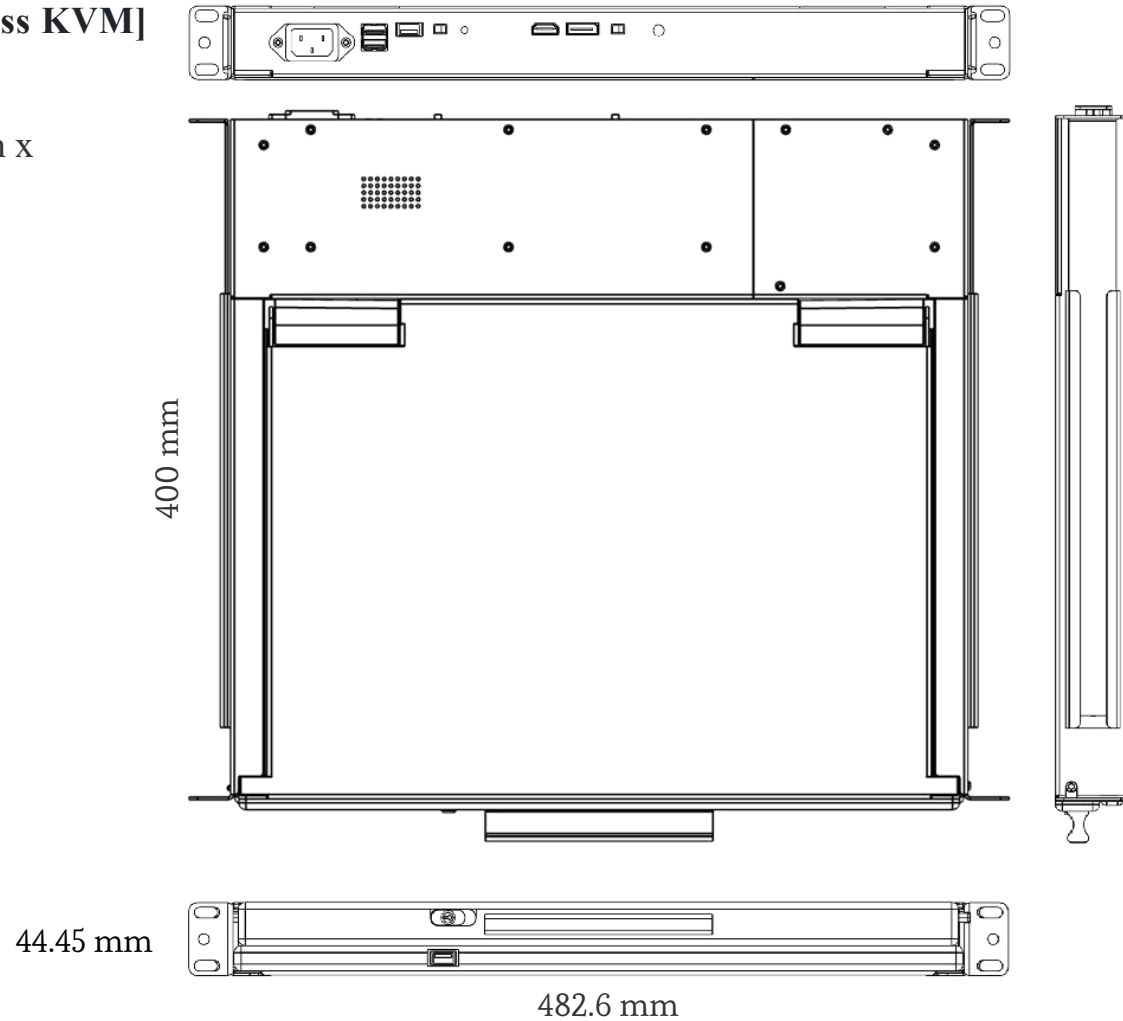


Technical Data - Wireless HDMI dongle

[Electronics]

- OS: OSD System
- DRAM: Built-in DDR2 64MB
- CPU: Dual-core ARM Cortex-A7, 1.2GHz
- Wireless: 5G Wi-Fi
- Wireless Resolution: 1920*1080@60fps
- Wireless Transmission Distance: ≥ 20 meters
- Transmission Latency: 50ms
- Power Consumption: 4W
- Power Supply: DC 5V/0.75A
- Interfaces: Type-C / HDMI

[Others]

- Screen Casting: Support external keyboard and touch back control
- Storage temperature: 0 to 60 °C
- Storage humidity: 5 to 90%
- Operating temperature: 0 to 70 °C
- Operating humidity: 10 to 90%



HENGYU

Heng Yu Technology (HK) Limited
<http://www.hengyu-tech.com>

Technical Data

[Mechanical Parameters: Wireless HDMI Dongle]

- Standard 1U Rack Mount size
HxWxL: 26.2 mm x 85.0 mm x 105,4mm

